



New generation  
**pumps**

# Mercurio

Electronic pump



## Use

**Mercurio** electronic pump is widely used in central heating, air conditioning, solar and heat pump systems.

**Its use, compared to old-type pumps, saves electricity up to 80%.**

## Materials

motor housing: **aluminum**

rotor : **plastic**

shaft: **ceramic**

bearings: **ceramic**

insulation: **biodegradable foam**

included: **two steel half-unions with gaskets and electric cable with plug**

## Technical details

liquid temperature: **from -10°C to 110°C**

acceptable working pressure: **10 bar**

acceptable ambient temperature: **40°C**

circulated liquid : **heating water according to VDI2035 and water-glycol at 1:1 ratio**

supply voltage: **220 - 230V (50Hz)**

protection class: **IP44**

insulation class: **F**

energy efficiency index: **EEI ≤ 0.20**

operating modes: **AUTO mode; I, II, III modes; HPP mode; LPP mode; HCP mode; LCP mode, NIGHT mode**

## Pump parameters

SIZE RANGE	POWER [W]	MAX FLOW [m³/h]	MAX HEAD [m]	BODY CONNECTOR DIAMETER
CI-PE-MERCURIO 25/40	5-22	2,6	4	1 1/2"
CI-PE-MERCURIO 25/60	5-45	3,6	6	1 1/2"


## Advantages

- additional venting and emergency rotor start-up, thanks to its innovative inspection sleeve located in the shaft axis
- self-venting design

### Possibility of additional venting




### Possibility of rotor start-up

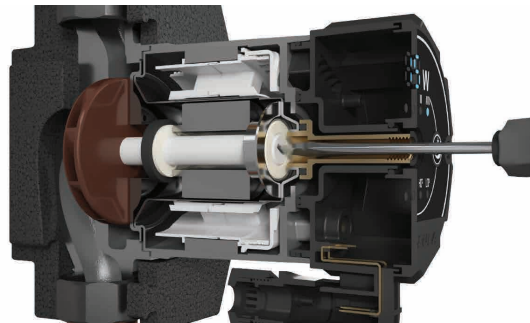

The pump is automatically vented when you hold down the "night reduction" button for 5 s.


## Dimensions

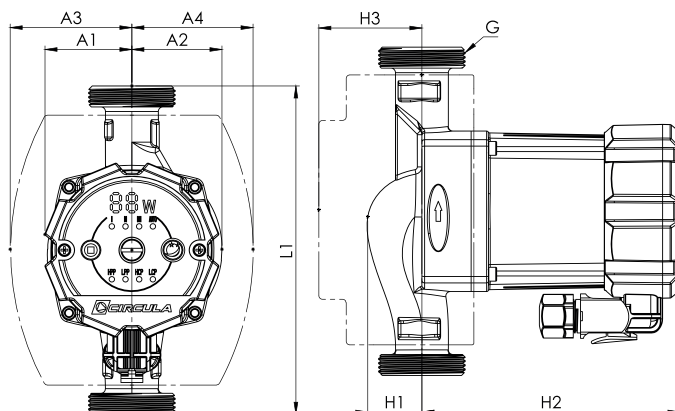


L1	A1	A2	A3	A4	H1	H2	H3	G
180	47	49	67	67	30	140	57	1 1/2
180	47	49	67	67	30	140	57	1 1/2

## Hydraulic characteristics of pumps

CI-PE-MERCURIO 25/40

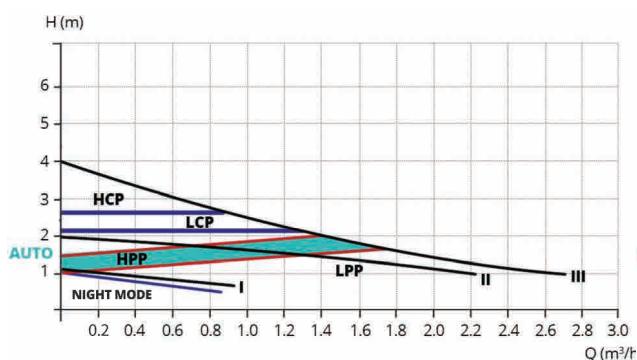

CI-PE-MERCURIO 25/60

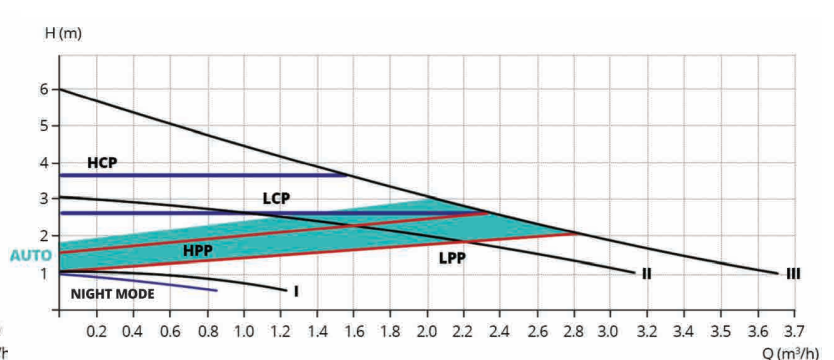



# Titanio

Electronic pump



## Use

**Titanio** electronic pump is widely used in central heating, air conditioning, solar and heat pump systems.

## Functionality

- 10 operating modes (characteristics: proportional pressure, constant pressure, constant speed) +AUTO mode
- equipped with an electric cable with plug and seals

## Technical details

liquid temperature: **2°C ÷ 95°C**  
acceptable ambient temperature: **0-40°C**  
temperature class: **TF=95°C**  
maximum operating pressure: **10 bar**  
supply voltage: **230V (50Hz)**  
protection class: **IP44**  
insulation class: **E**  
highest energy efficiency index: **EEL ≤ 0.20**  
circulated liquid: **water (conforms to the PN-C-04607:1993 standard and should be free of solid particles, fibers and impurities)**


## Pump parameters

SIZE RANGE	BODY CONNECTOR DIAMETER	MAX FLOW [m3/h]	HEAD [m]	POWER [W]	CURRENT [A]
CI-TITANIO 25/40-180	G 1 1/2"	2,5	0,7 - 4	25	0,3
CI-TITANIO 25/60-180	G 1 1/2"	3,2	1 - 6	45	0,5
CI-TITANIO 25/60-130	G 1 1/2"	3,2	1 - 6	45	0,5
CI-TITANIO 25/80-130	G 1 1/2"	3,4	1,5 - 8	65	0,65
CI-TITANIO 25/80-180	G 1 1/2"	3,6	1,5 - 8	65	0,65
CI-TITANIO 32/80-180	G 2"	4	1,5 - 8	65	0,65

## Advantages

- modern and high-efficiency EC motor with electronic control and motor current protection in case of rotor blockage
- equipped with PWM signal control connector
- pump mode indicator with error code display in case of damage
- automatic pump venting function
- pump start-up function
- compact pump design


## Dimensions

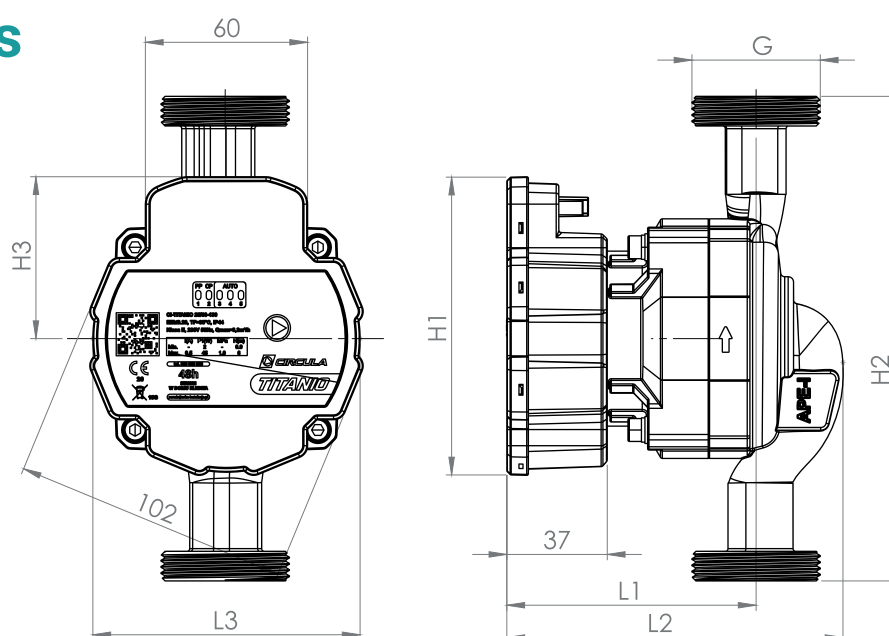


SIZE RANGE	DIMENSION [ mm ]						
	L1	L2	L3	H1	H2	H3	G
CI-TITANIO 25/X-130	93	126	99	110	130	60	G 1 1/2"
CI-TITANIO 25/X-180					180		G 1 1/2"
CI-TITANIO 32/X-180							G 2"

## Hydraulic characteristics of pumps


CI-TITANIO 25/40

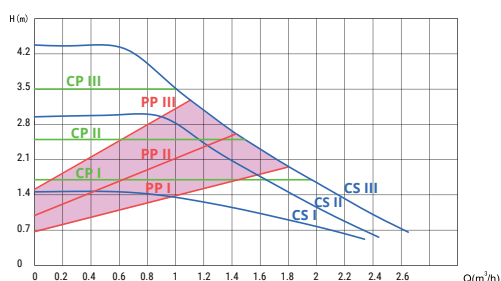

CI-TITANIO 25/60

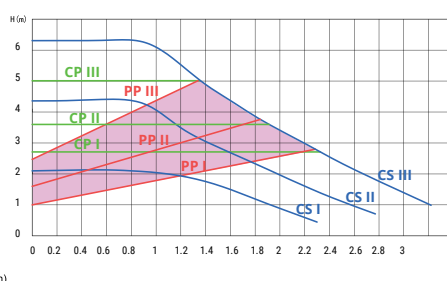

CI-TITANIO 25/80, CI-TITANIO 32/80

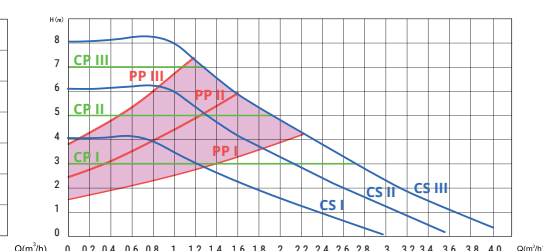

■ PP proportional pressure curve  
■ CP constant pressure curve  
■ CS fixed curve  
■ AUTO

# Helio

Electronic pump



## Use

Helio electronic pump is widely used in central heating, air conditioning, solar and heat pump systems.

**Its use, compared to old-type pumps, saves electricity up to 80%.**

## Technical details

energy efficiency index: **EEI  $\leq$  0.20**

liquid temperature: **from  $-10^{\circ}\text{C}$  to  $110^{\circ}\text{C}$**

acceptable operating pressure: **10 bar**

acceptable ambient temperature:  **$40^{\circ}\text{C}$**

circulated liquid: **heating water according to VDI2035**

**and water-glycol at 1:1 ratio**

supply voltage: **230V (50Hz)**

protection class: **IP44**


insulation class: **F**

**6 speeds + AUTO mode**


**self-venting design**

## Hydraulic characteristics of pumps

CI-HELIO 25/40-180

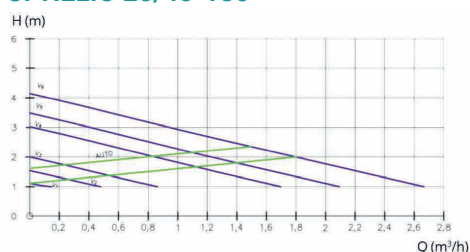


CI-HELIO 25/60-130, CI-HELIO 25/60-180

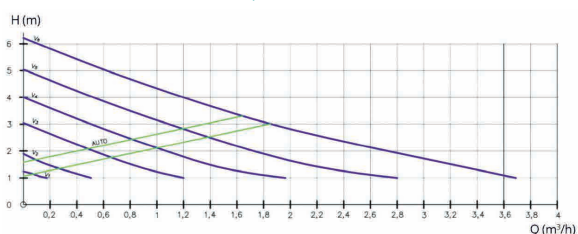

## Pump parameters

SIZE RANGE	MAX FLOW [m³/h]	BODY CONNECTOR DIAMETER	MAX HEAD [m]	POWER
Helio 25/40-180	2,3	G 1 1/2"	4	22
Helio 25/60-180	3,1	G 1 1/2"	6	45
Helio 25/60-130	3,1	G 1 1/2"	6	45

## Dimensions

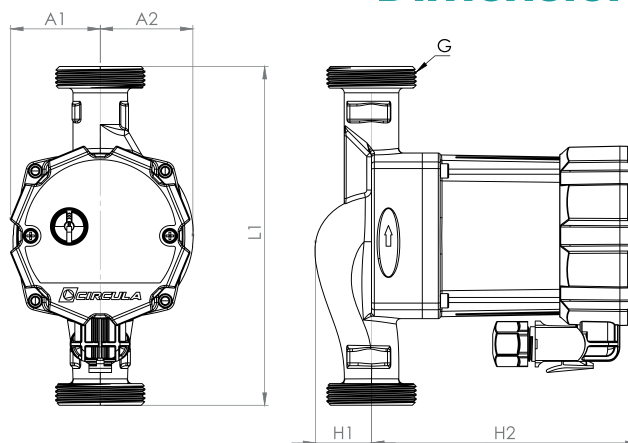

SIZE RANGE	DIMENSION [ mm ]					
	L1	A1	A2	H1	H2	G
HELIO 25/60-130	130	47	49	30	140	1 1/2"
HELIO 25/40-180	180	47	49	30	140	1 1/2"
HELIO 25/60-180	180	47	49	30	140	1 1/2"

## Use

**Platino** electronic pump is widely used in domestic hot water systems. It is intended for drinking water only.

## Technical details

max head: **H max=1.2 m**  
max flow: **Q max=0.6 m<sup>3</sup>/h**  
supply voltage: **230 V, 50 Hz**  
rated power: **6 W**  
power consumption **P1 min=2 W**  
max current input **P1 max=9 W**  
insulation class: **F**  
protection class: **IP44**  
max domestic hot water temperature: **TF=95°C**  
max operating pressure: **PN=10 bar**  
current: **0,11 A**  
body connector **diameter 1/2"**  
liquid circulated: **meeting the requirements of the Regulation of the Minister of Health of 7 December 2017, on the quality of water intended for human consumption.**

## Advantages

- with a programmer
- with a temperature sensor


# Platino

Electronic circulation pump  
for drinking water




## Hydraulic characteristics of pumps

CI-P-PLATINO 15

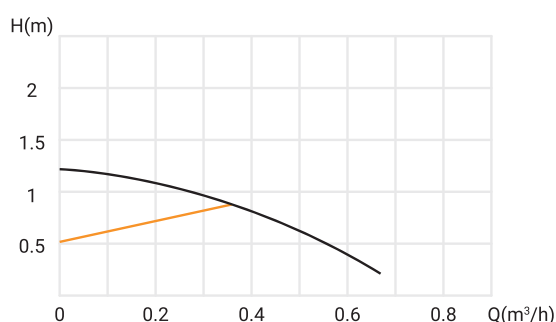

## Dimensions

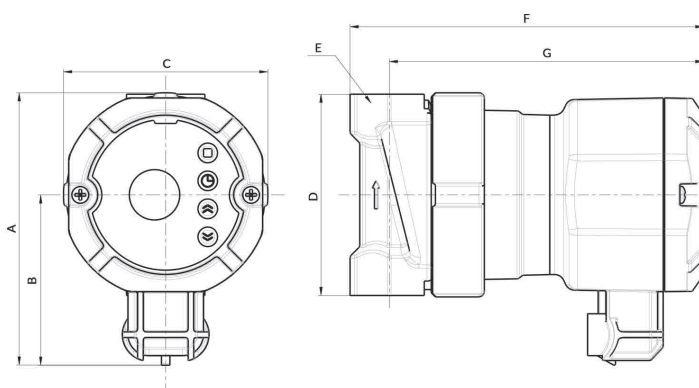

SIZE RANGE				TYPE		
CI-P-PLATINO 15				15/10		
DIMENSION [ mm ]						
A	B	C	D	E	F	G
97	61	73	72	G1/2	126	112

# Galio

Electronic pump



## Use

Galio electronic pump is widely used in central heating, air conditioning, solar and heat pump systems.

## Functionality

- equipped with a control panel with LED display
- automatically venting design
- equipped with a central screw for venting and starting-up the rotor
- electric cable and half unions included

## Technical details

liquid temperature: **from 2°C to 110°C**

acceptable working pressure: **10 bar**

acceptable ambient temperature: **40°C**

circulated liquid: **heating water according to VDI2035 and water-glycol at 1:1 ratio**

supply voltage: **220 - 230V (50Hz)**


protection class: **IP44**

insulation class: **F**


energy efficiency index: **EEL≤0.23**

## Hydraulic characteristics of pumps

CI-GALIO 25/80-180

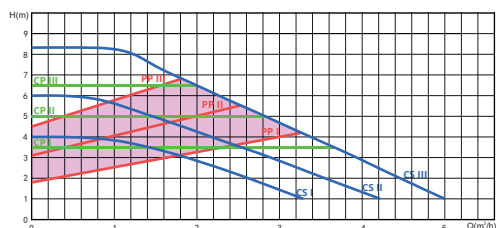

CI-GALIO 32/80-180

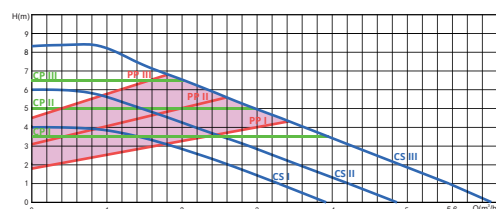


■ PP proportional pressure curve  
■ CP constant pressure curve  
■ CS fixed curve  
■ AUTO

## Pump parameters

SIZE RANGE	POWER (W)	MAX FLOW (m³/h)	MAX HEAD (m)	BODY CONNECTOR DIAMETER
CI-PE-GALIO 25/80	80	5	0,3-8	1 1/2"
CI-PE-GALIO 32/80	80	6	0,3-8	2"

## Dimensions

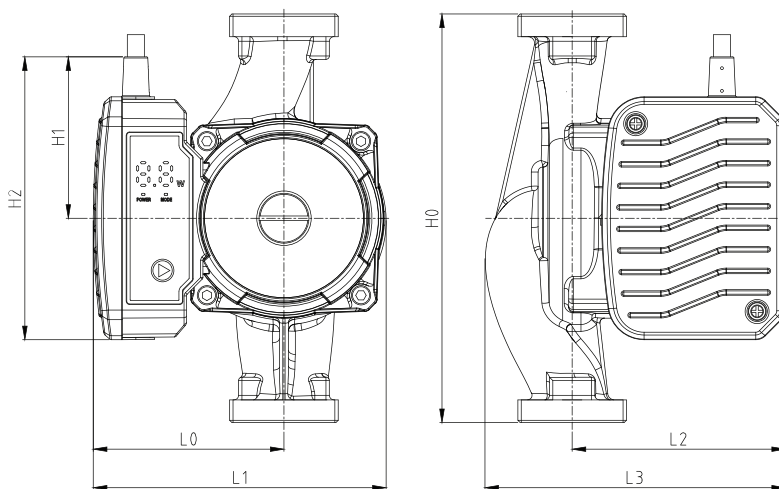

SIZE RANGE	DIMENSION (mm)							NET WEIGHT
	L0	L1	L2	L3	H0	H1	H2	kg
CI-GALIO 25/80-180	84	130	94	132	180	71	125	2,7
CI-GALIO 32/80-180								3,0



## Use

**Torio** electronic pump is widely used in domestic hot water systems. Its use, compared to old-type pumps, saves electricity up to 80%.

## Technical details

max head: **1.2 m**

max flow: **12 l/min (0.72 m<sup>3</sup>/h)**

max water temperature in the system: **95°C**

acceptable operating pressure: **10 bar**

acceptable ambient temperature: **40°C**

circulated liquid: **pure water, non-aggressive, non-explosive, free of mineral oils**

supply voltage: **220 - 230V (50Hz)**

protection class: **IP44**

insulation class: **F**

**6 speeds + ECO mode**

## Material

body: **stainless steel**

motor housing: **plastic**

rotor: **composite plastic**

rotor axis: **stainless steel/ceramic**

bearings: **ceramic**

electric cable with plug included


# Torio

Electronic circulated pump  
for drinking water




## Hydraulic characteristics of pumps

CI-P-TORIO 15/12

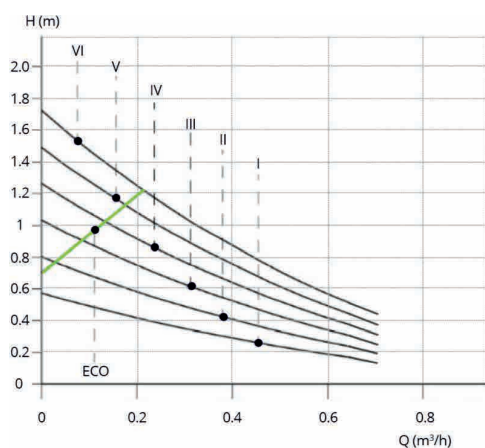

## Dimensions

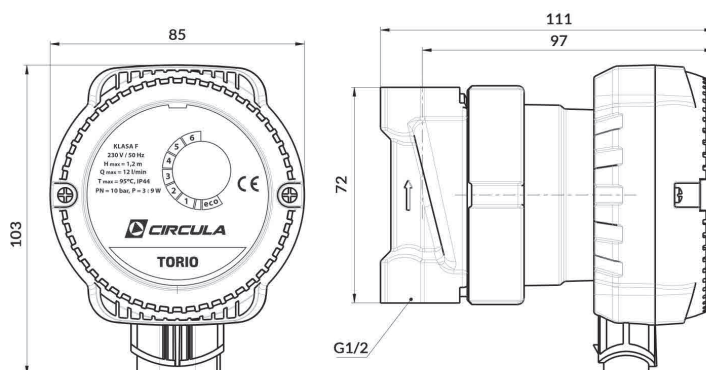

SIZE RANGE	TYPE
CI-P-TORIO 15/12	15/12


# Selenio

Electronic pump




## Hydraulic characteristics of pumps

CI-SELEN 25/120-180

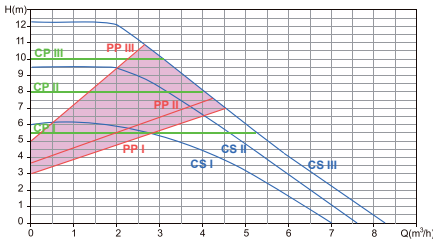

CI-SELEN 32/120-180

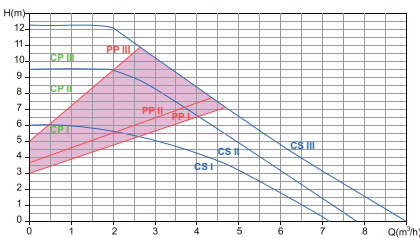

PP CP CS AUTO  
proportional constant fixed  
pressure pressure  
curve curve

## Pump parameters

## Use

Selenio electronic pump is widely used in central heating, air conditioning, solar and heat pump systems.  
**Its use, compared to old-type pumps, saves electricity up to 80%.**


## Functionality

- equipped with a control panel with LED display
- automatically venting design
- equipped with a central screw for venting and starting-up the rotor
- electric cable and half unions included

## Technical details

liquid temperature: **from 2°C to 110°C**  
acceptable working pressure: **10 bar**  
acceptable ambient temperature: **40°C**  
circulated liquid: **heating water according to VDI2035 and water-glycol at 1:1 ratio**  
supply voltage: **220 - 230V (50Hz)**  
protection class: **IP44**  
insulation class: **F**  
energy efficiency index: **EELs0.23**

## Dimensions

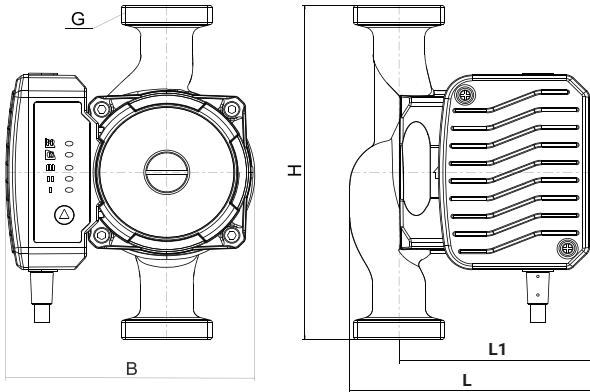

SIZE RANGE	DIMENSION (mm)					NET WEIGHT
	L	L1	H	B	G	kg
CI-SELEN 25/120-180	133	95	180	143	1 1/2"	3,1
CI-SELEN 32/120-180					2"	3,5
CI-SELEN 25/120-180					1 1/2"	3,1
CI-SELEN 32/120-180					2"	3,5

SIZE RANGE	POWER (W)	MAX FLOW (m³/h)	MAX HEAD (m)	BODY CONNECTOR DIAMETER
CI-SELEN 25/100-180	140	7,5	0-10	1 1/2"
CI-SELEN 32/100-180	140	8	0-10	2"
CI-SELEN 25/120-180	180	8,5	0-12	1 1/2"
CI-SELEN 32/120-180	180	9	0-12	2"

## Use

**Circulation pump** can be used for drinking water in accordance with Commission Regulation (EC) No. 641/2009. High-quality asynchronous motor, no overload protection required. The capacity of the pump is regulated by a 3-position switch located on the electrical module box, which allows you to adjust the operation of the pump to the characteristics of the installation.

## Technical details

liquid temperature: **from -10°C to 110°C**

acceptable working pressure: **10 bar**

acceptable ambient temperature: **40°C**

circulated liquid: **drinking water**

supply voltage: **1 ~ 230V ±10%**

frequency: **50Hz**

protection class: **IP44**

insulation class: **F**

## Material

body: **cast iron covered inside with GLAZE 221**

motor housing: **aluminum**

impeller: **plastic**

shaft: **ceramic**

bearings: **ceramic**

included with pump: **electric cable with plug and 2 steel half-unions with gaskets**


# PC

Circulation pump  
**for drinking water**




## Hydraulic characteristics of pumps


**CI-PC 25/40-180**

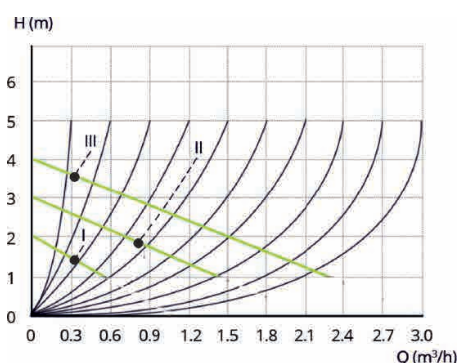

**CI-PC 25/60-130, CI-PC 25/60-180,**

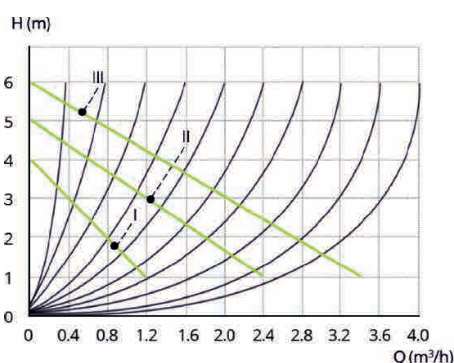


**CI-PC 25/80-180, CI-PC 32/80-180**

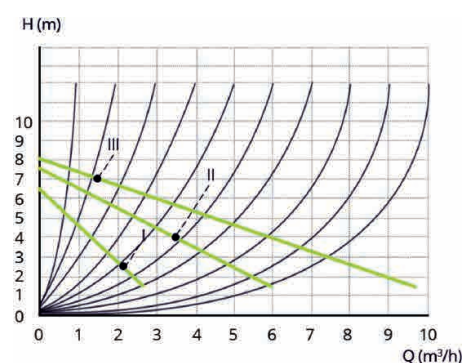



## Dimensions

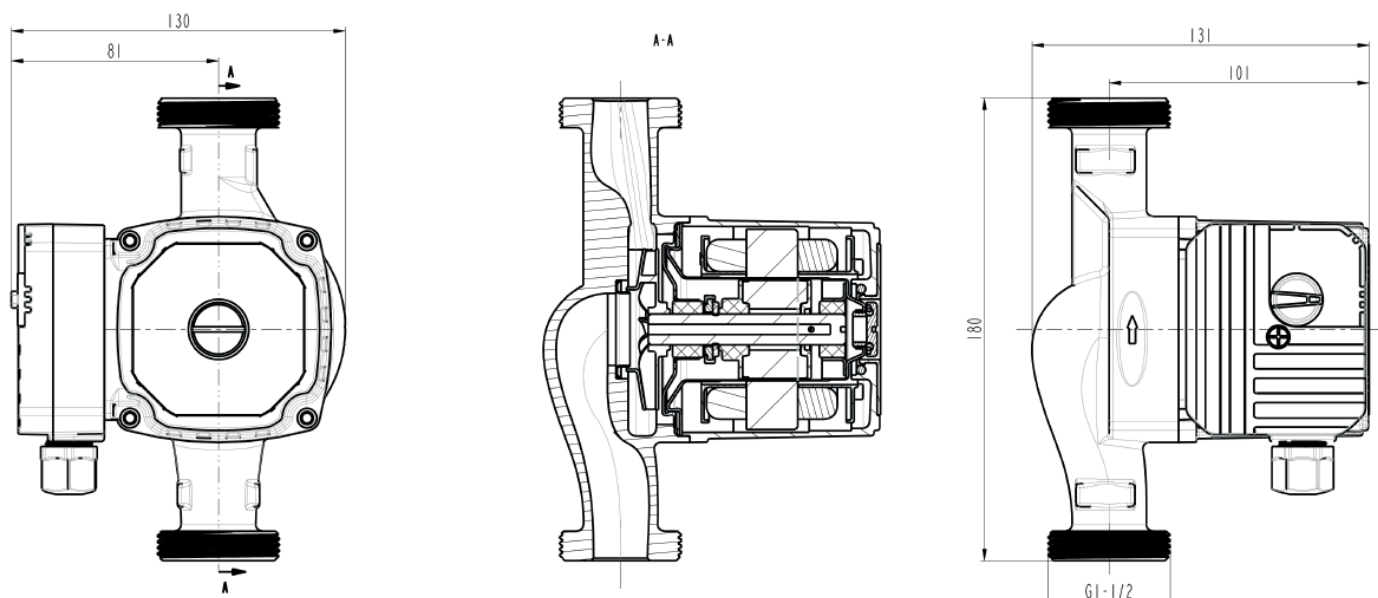

## Pump parameters

SIZE RANGE	MAX FLOW (m <sup>3</sup> /h)	MAX HEAD (m)	MOUNTING LENGTH (A - mm)	BODY CONNECTOR DIAMETER
CI-PC25/40-180	2,9	4	180	1 1/2"
CI-PC25/60-180	3,3	6	180	1 1/2"
CI-PC25/60-130	3,3	6	130	1 1/2"
CI-PC25/60-130 BPS*	3,3	6	130	1 1/2"
CI-PC25/80-180	6,9	8	180	1 1/2"
CI-PC32/80-180	9,6	8	180	2"

\* without cable and half-unions

**Arka Sp. z o.o.**  
ul. Ogrodowa 5,  
76-004 Sianów  
Poland

tel.: +48 94 341 77 19  
fax +48 94 346 27 68

[arka-instalacje.pl](http://arka-instalacje.pl)